


5/2 SOLENOID VALVE BM520

FEATURES

The BM 520 5/2 monostable solenoid valve is designed to control valves with double-acting actuators. It has a nominal flow rate of 1000 l/min at 6 bar. It is fitted with a manual override for local operation of the valve.



AVAILABLE MODELS

230Vac 50-60Hz, 24Vac, 48Vdc 24Vdc, 12Vdc



LIMITS OF USE



Ambient temperature: TS	-10°C / +50°C
Compressed air	1,5 - 8 bar
Degree of protection	IP 65



MECHANICAL CHARACTERISTICS

Body	Aluminium anodisé
Hydraulic test	10 bar
Power connections and uses	G ¼ "
Exhaust connections	G 1/8 "
Connector	DIN T30

DIMENSIONS (mm)

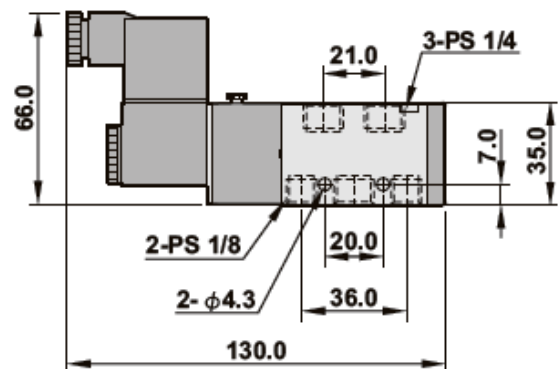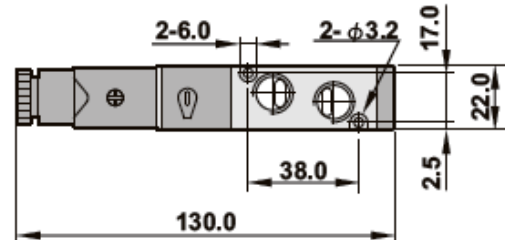

ELECTRICAL CHARACTERISTICS


Coil	DIN - insulation class F			
Tensions	230V ac 110V dc	24 V ac	24 V dc 48 V ac	12 V dc
Power	6 VA 3,6 W	8,5 VA	4,8 W 6 VA	4,6

Information given as an indication only, and subject to possible modifications

	SECTORIEL S.A. 45 rue du Ruisseau 38290 SAINT QUENTIN-FALLAVIER – FRANCE Tél : +33 4 74 94 90 70 - Fax : +33 4 74 94 13 95 www.sectoriel.com / Email : sectoriel@sectoriel.fr	Pages	1/2
		Ref.	TDS4249
		Rev.	03
		Date	09/2025

5/2 SOLENOID VALVE BM520

FLOW DIAGRAM

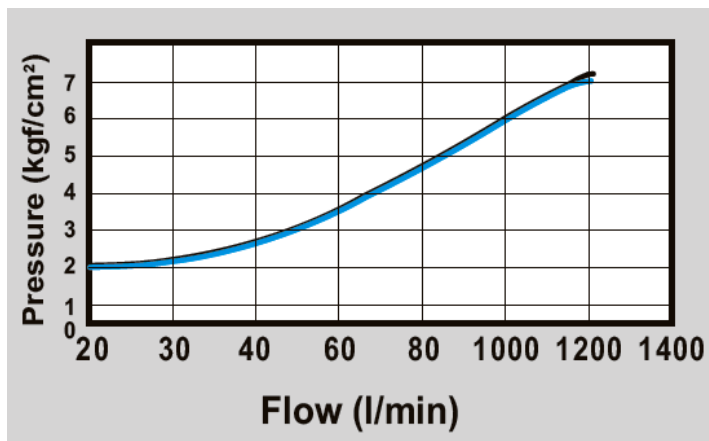

OPTIONS

Silencer

SPARE PARTS

Coils				
Tensions	230V ac	24 V ac	24 V dc	12 V dc
	110V dc		48 V ac	
Code	980260	980263	980261	980262

Information given as an indication only, and subject to possible modifications

	SECTORIEL S.A. 45 rue du Ruisseau 38290 SAINT QUENTIN-FALLAVIER – FRANCE Tél : +33 4 74 94 90 70 - Fax : +33 4 74 94 13 95 www.sectoriel.com / Email : sectoriel@sectoriel.fr	Pages	2/2
		Ref.	TDS4249
		Rev.	03
		Date	09/2025