

NAC BRASS SIGHT GLASS

FEATURES

The NAC sight glass is designed for the visual inspection of flow for fluids inside piping.
Made of brass with and a borosilicate glass, it is especially designed for process fluids.
Installation in all positions.

AVAILABLE MODELS

NAC : G 1/4" to G 1/2"
G thread connections.



LIMITS OF USE


Fluide WP :	10 bar
Fluide WT :	+5°C / +70°C

DIRECTIVES AND MANUFACTURING STANDARDS

OBJET	Standard
Pressure Equipment Directive 2014/68	A4 § 3 : non soumis
Threaded connection	ISO 228

DIMENSIONS (mm) AND WEIGHT (kg)

DN	L	AF (Tightening key)	D	d	E	Weight (kg)
G 1/4"	70	19	1/4"	5	12	0,085
G 3/8"	70	27	3/8"	8	12	0,170
G 1/2"	80	32	1/2"	12	15,5	0,280

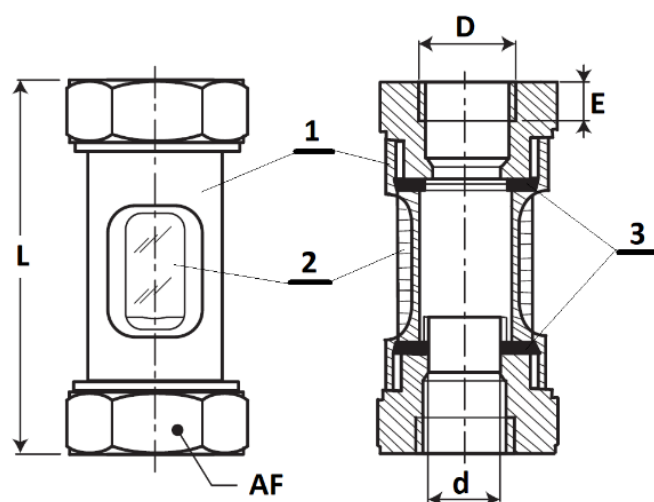


CONSTRUCTION

No.	Name	Material
1	Body	Brass
2	Glass	Borosilicate
3	Gaskets	FPM

INSTALLATION

Installation in all positions.

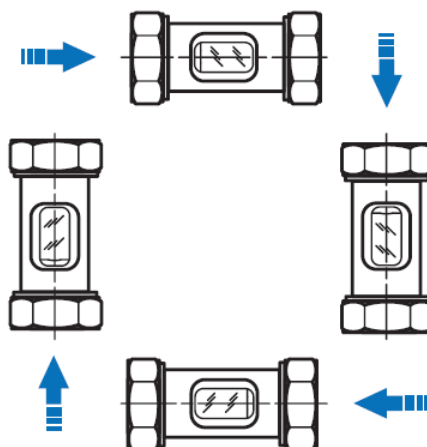

Informations données à titre indicatif et sous réserve de modifications éventuelles.



SECTORIEL S.A.
45 rue du Ruisseau
38290 SAINT QUENTIN-FALLAVIER – FRANCE
Tél : +33 4 74 94 90 70 - Fax : +33 4 74 94 13 95
www.sectoriel.com / Email : sectoriel@sectoriel.fr

Pages	1/1
Ref.	FT2205 ENG
Rev.	01
Date	09/2023