

DUCTILE IRON FLANGED BALL CHECK VALVE PN10

PRODUCT EVOLUTION



Be careful, our ball check valves 332 are changing

**We currently have 2 different types available (according to DN)
with different dimensions and spare parts**

New type :



At the end, only the new type will be available (from pages 2 to 6)

DUCTILE IRON FLANGED BALL CHECK VALVE PN10

Ductile iron flanged PN10 ball check valve for water distribution and watering.
Ductile iron body EN GJS-500-7 epoxy anticorrosion painting coated and stainless steel bolting.
Removable bonnet for easy maintenance.

Certificat

3.1

NEW



Size : DN40 to DN300
Connection : Flanges PN10/16 RF
Min Temperature : -10°C
Max Temperature : +80°C
Max Pressure : 16 Bars (up to DN150)
Specifications : Ball type
Vertical or horizontal installation
Removable bonnet

Materials : Ductile iron body EN GJS-500-7

DUCTILE IRON FLANGED BALL CHECK VALVE PN10


SPECIFICATIONS :

- Ball type
- Vertical with ascendant fluid or horizontal (respect the flow direction indicated by the arrow)
- PN10/16 RF Flanges from DN40 to 150, PN10 over
- Easy maintenance thanks to the bolted bonnet
- Anti-corrosion epoxy painting RAL 5005 blue color, 250 microns thickness
- Anti-corrosion stainless steel bolting
- Minimum backpressure for tightness: 1 bar

USE :

- Water distribution and watering
- Min Temperature Ts : - 10°C
- Max Temperature Ts : + 80°C
- Max Pressure Ps : 16 bars up to DN150, 10 bars over

HEAD LOSS GRAPH :

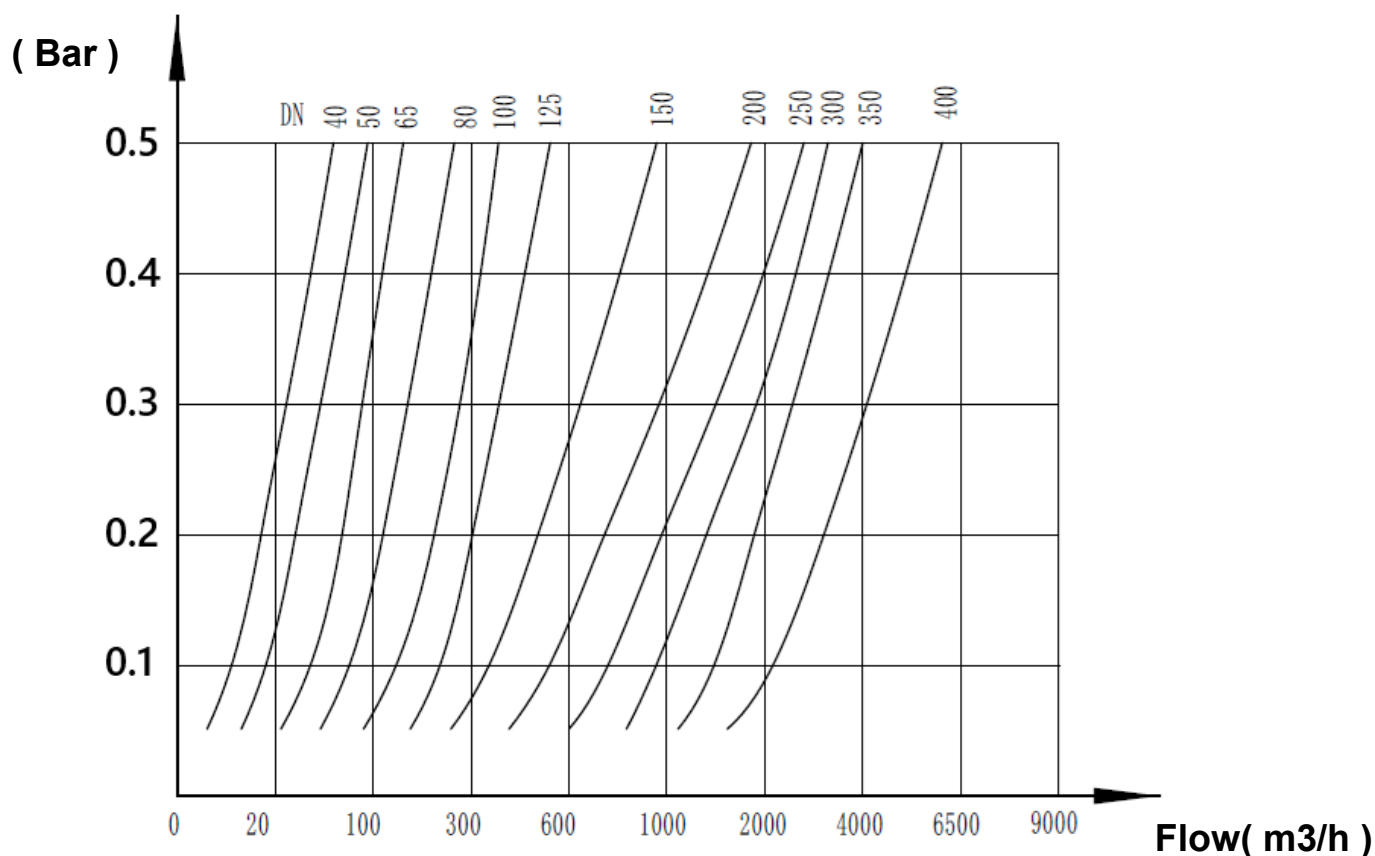

FLOW COEFFICIENT Kvs (in m3/h) :

DN	50	65	80	100	125	150	200	250	300
Kvs (m3/h)	72	210	390	425	720	880	1550	2250	3250

DUCTILE IRON FLANGED BALL CHECK VALVE PN10

RANGE :

- PN10/16 RF Flanges from DN40 to 150 and PN10 over **Ref. 332** from DN40 to 300

REPAIRABILITY :



Marking :




DN	O ring bonnet gasket (item 3)	Ball (item 2)
	Ref. and dimensions	Ref.
DN40	9803781 (Ø 54.5x3.55)	9803770
DN50	9803783 (Ø 71x3.55)	9803771
DN65	9803784 (Ø 90x3.55)	9803772
DN80	9803785 (Ø 107x4)	9803773
DN100	9803786 (Ø 132x5.3)	9803774
DN125	9803787 (Ø 180x5.3)	9803775
DN150	9803788 (Ø 218x5.3)	9803776
DN200	9803789 (Ø 283x7)	9803777
DN250	9803790 (Ø 335x7)	9803778
DN300	9803791 (Ø 391x7)	9803779


DUCTILE IRON FLANGED BALL CHECK VALVE PN10

MATERIALS :

DN40-100

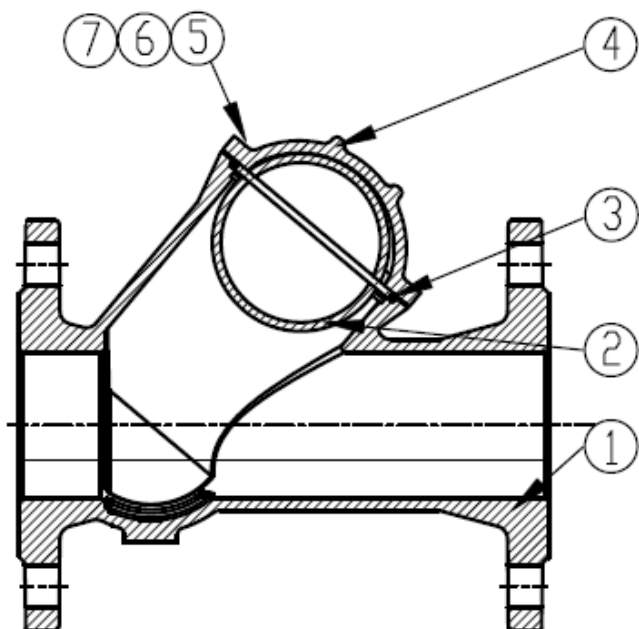

DN125-300

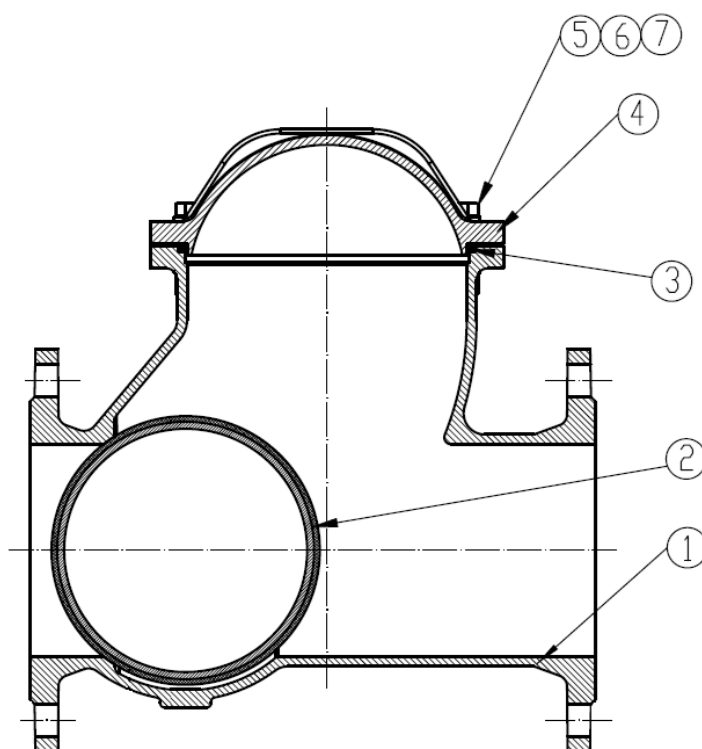


Item	Designation	Materials
1	Body	Ductile iron EN GJS-500-7
2	Ball	Carbon steel NBR coated
3	Bonnet gasket	NBR
4	Bonnet	Ductile iron EN GJS-500-7
5	Nut	AISI 304
6	Screw	
7	Washer	


DUCTILE IRON FLANGED BALL CHECK VALVE PN10

SIZE (in mm) :

DN40-100

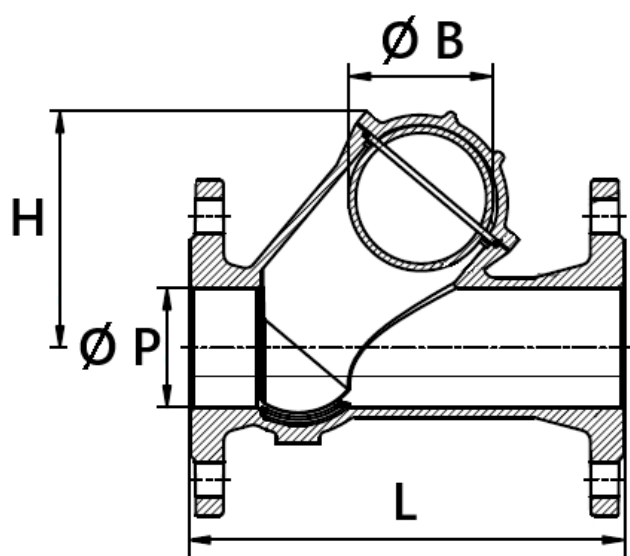


DN125-300

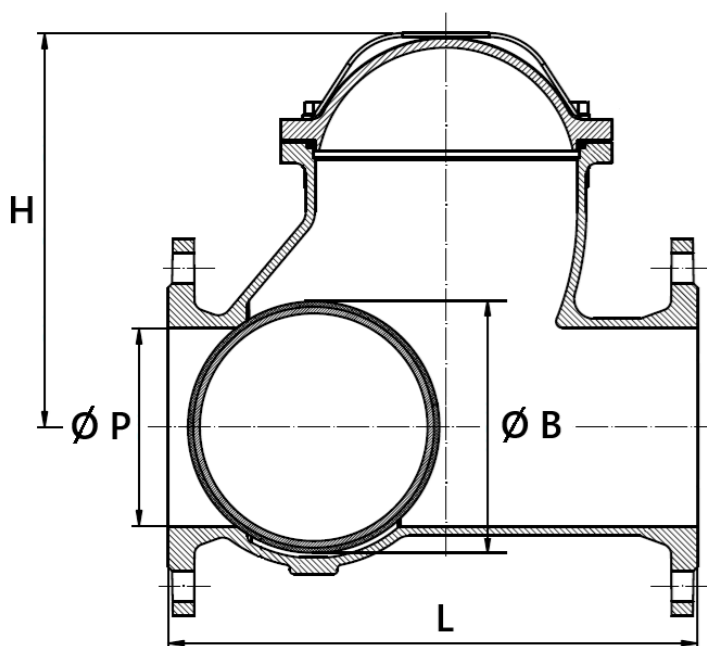

DN	40	50	65	80	100	125	150	200	250	300
L	180	200	240	260	300	350	400	500	600	700
H	92	110	135	155	198	250	300	370	455	520
Ø B	49.5	62	80	100	125	155	190	250	300	356
Ø P	40	50	65	80	100	125	150	200	250	300
Weight (in Kg)	7	7	9.5	12.6	15.7	26	37.2	68.2	107	146.5
Ref.	332040	332050	332065	332080	332100	332125	332150	332200	332250	332300

DUCTILE IRON FLANGED BALL CHECK VALVE PN10

FLANGES SIZE (in mm) :

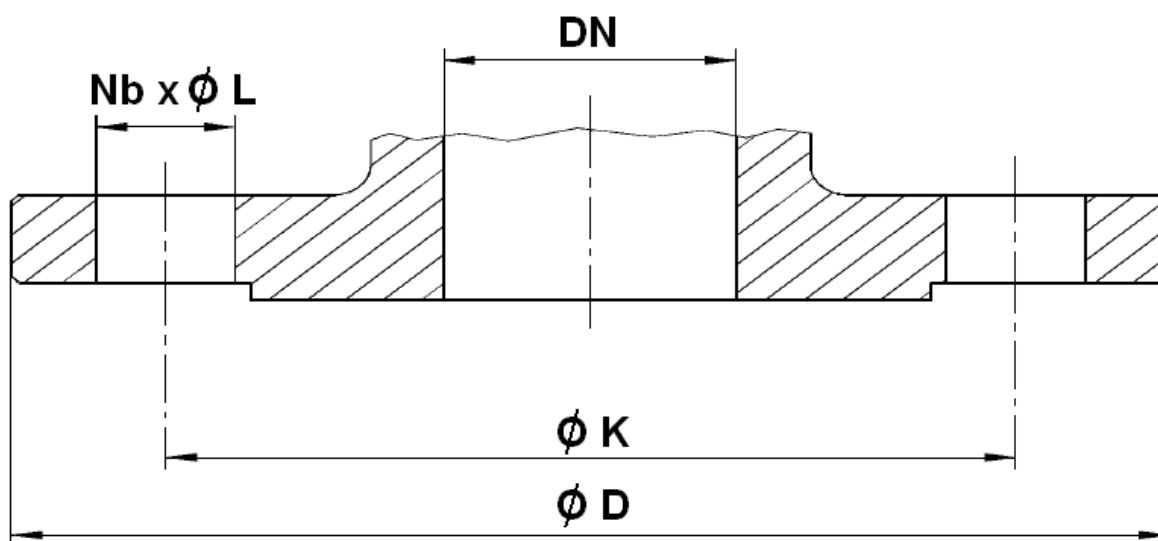

DN	40	50	65	80	100	125	150	200	250	300
Ø D	150	165	185	200	220	250	285	340	405	460
Ø K	110	125	145	160	180	210	240	295	350	400
Nb x Ø L	4 x 19			8 x 19			8 x 23		12 x 23	


DUCTILE IRON FLANGED BALL CHECK VALVE PN10

STANDARDS :


- Manufacturer certified ISO 9001 : 2015 and ISO 14001 : 2015
- DIRECTIVE 2014/68/EU : Products excluded from directive (Article 1, § 2b)
- Certificate 3.1 on request
- Design according to EN 5153
- PN10/16 flanges according to EN 1092-2
- Length according to EN 558 series 48 (DIN 3202 F6)
- **Body** test according to EN 12266-1

INSTALLATION POSITIONS :

Vertical position (Ascendant fluid)

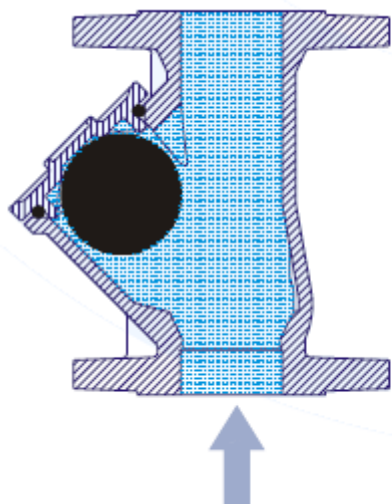

Horizontal position

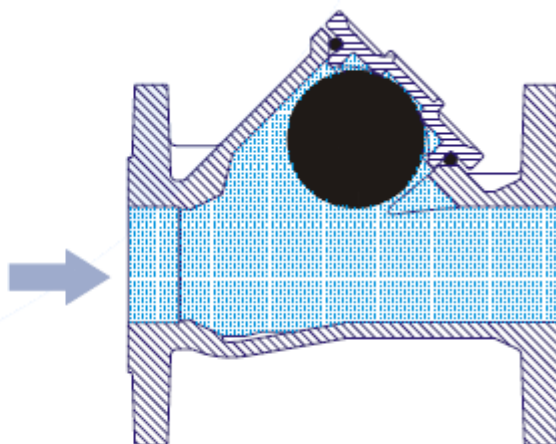

ADVICE : Our opinion and our advice are not guaranteed and SFERACO shall not be liable for the consequences of damages. The customer must check the right choice of the products with the real service conditions.

DUCTILE IRON FLANGED BALL CHECK VALVE PN10

Ductile iron flanged PN10 ball check valve for water distribution and watering.
Ductile iron body EN GJS-400-15 expoy anticorrosion painting coated and stainless steel bolting.
Removable bonnet for easy maintenance.

Certificate

3.1



Size : DN40 to DN300
Connection : Flanges PN10/16 RF
Min Temperature : -10°C
Max Temperature : +90°C
Max Pressure : 10 Bars
Specifications : Ball type
Vertical or horizontal installation
Removable bonnet

Materials : Ductile iron body EN GJS-400-15

DUCTILE IRON FLANGED BALL CHECK VALVE PN10


SPECIFICATIONS :

- Ball type
- Vertical with ascendant fluid or horizontal (respect the flow direction indicated by the arrow)
- PN10/16 RF Flanges from DN40 to 150, PN10 over
- Easy maintenance thanks to the bolted bonnet
- Anti-corrosion epoxy painting RAL 5005 blue color, 250 microns thickness
- Anti-corrosion stainless steel bolting
- Minimum backpressure for tightness: 1 bar

USE :

- Water distribution and watering
- Min Temperature Ts : - 10°C
- Max Temperature Ts : + 90°C
- Max Pressure Ps : 10 bars

HEAD LOSS GRAPH :

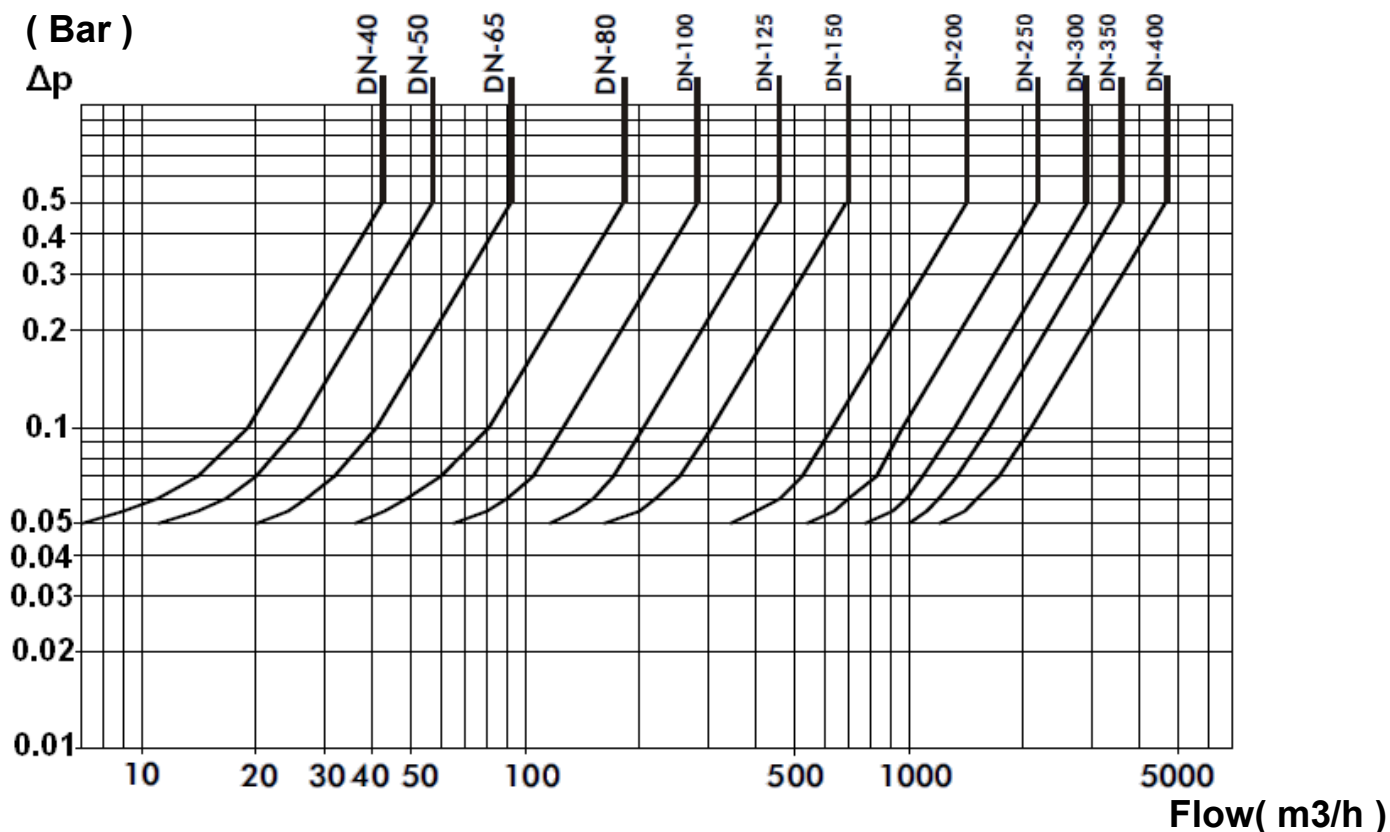

FLOW COEFFICIENT Kvs (in m³/h) :


DN	40	50	65	80	100	125	150	200	250	300
Kvs (m³/h)	60	81	130	255	400	645	970	2000	3050	4150

DUCTILE IRON FLANGED BALL CHECK VALVE PN10

RANGE :

- PN10/16 RF Flanges from DN40 to 150 and PN10 over **Ref. 332** from DN40 to 300

MATERIALS :

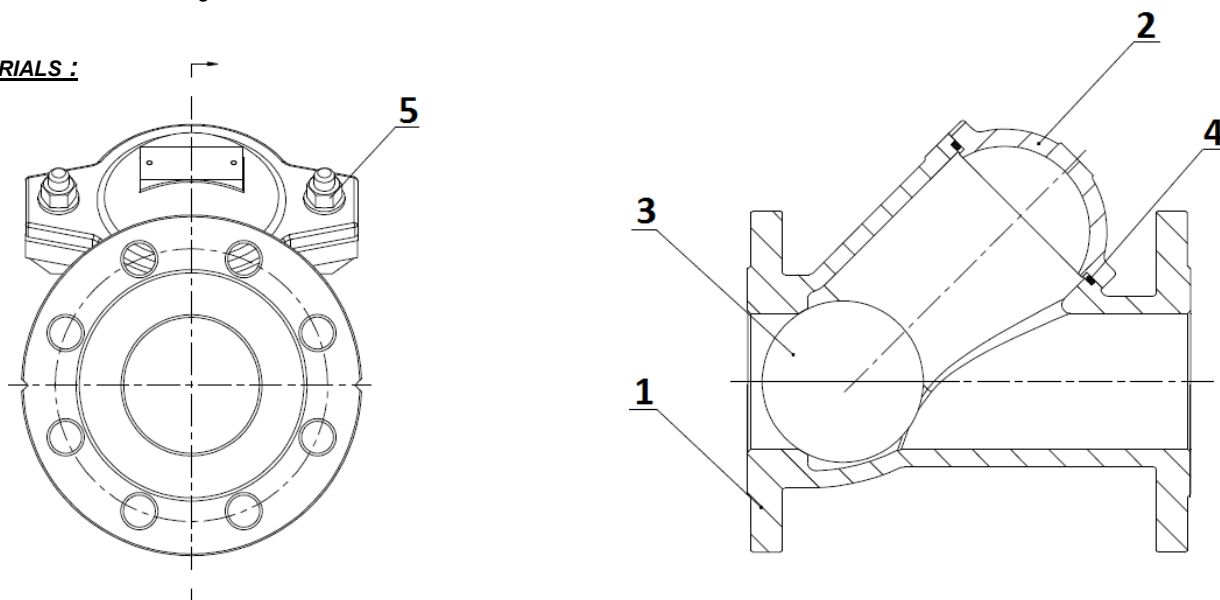

Item	Designation	Materials
1	Body	Ductile iron EN – GJS – 400-15
2	Bonnet	Ductile iron EN – GJS – 400-15
3	Ball DN 40	NBR
3	Ball DN 50 – DN80	Aluminium coated NBR
3	Ball DN 100 – 300	Carbon steel A216WCB coated NBR
4	Bonnet gasket	NBR
5	Bolting	AISI 304

REPAIRABILITY :





* : modification in progress of the bonnet gasket, contact us to valid the good type

DN	O ring bonnet gasket (item 4)*	Ball (item 3)
	Ref. and dimensions	Ref.
DN40	9803751 (Ø 60x5.3)	9803741
DN50	9803752 (Ø 69x5.3)	9803742
DN65	9803753 (Ø 115x5.7)	9803743
DN80		
DN100	9803754 (Ø 145x5.7) or 9803764 (Ø 140x5.7)	9803744
DN125	9803755 (Ø 205x5.7) or 9803765 (Ø 195x8.6)	9803745
DN150		
DN200	9803756 or 9803766 (Ø 245x8)	9803746
DN250	9803757	9803747
DN300	9803758	9803748

DUCTILE IRON FLANGED BALL CHECK VALVE PN10


SIZE (in mm) :

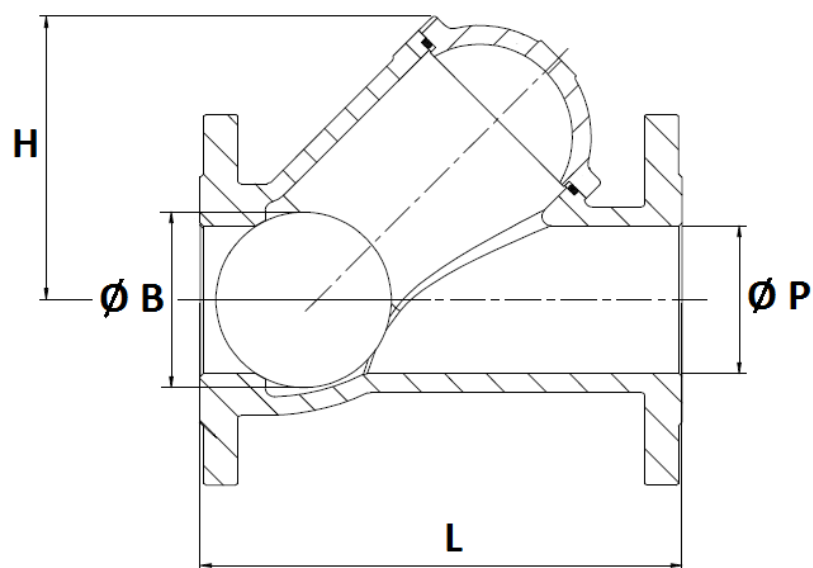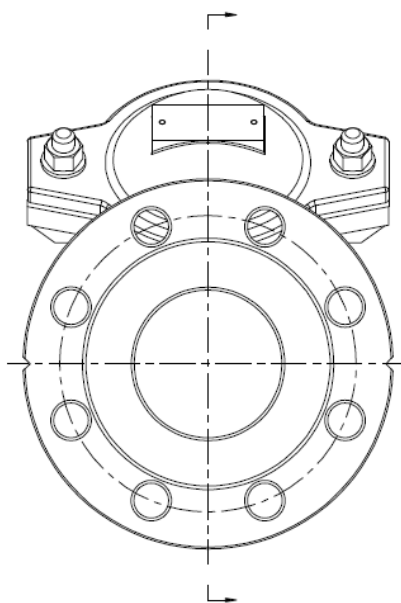

DN	40	50	65	80	100	125	150	200	250	300
L	180	200	240	260	300	350	400	500	600	700
H	103	111	141.5	151	190	239	280	338.5	413	472
Ø B	50	60	95	95	120	175	175	240	300	360
Ø P	40	51	80	80	100	144	150	200	250	300
Weight (in Kg)	6.09	9.32	16.1	17.8	17.5	31.5	38	67.7	135	191.8
Ref.	332040	332050	332065	332080	332100	332125	332150	332200	332250	332300

DUCTILE IRON FLANGED BALL CHECK VALVE PN10

FLANGES SIZE (in mm) :

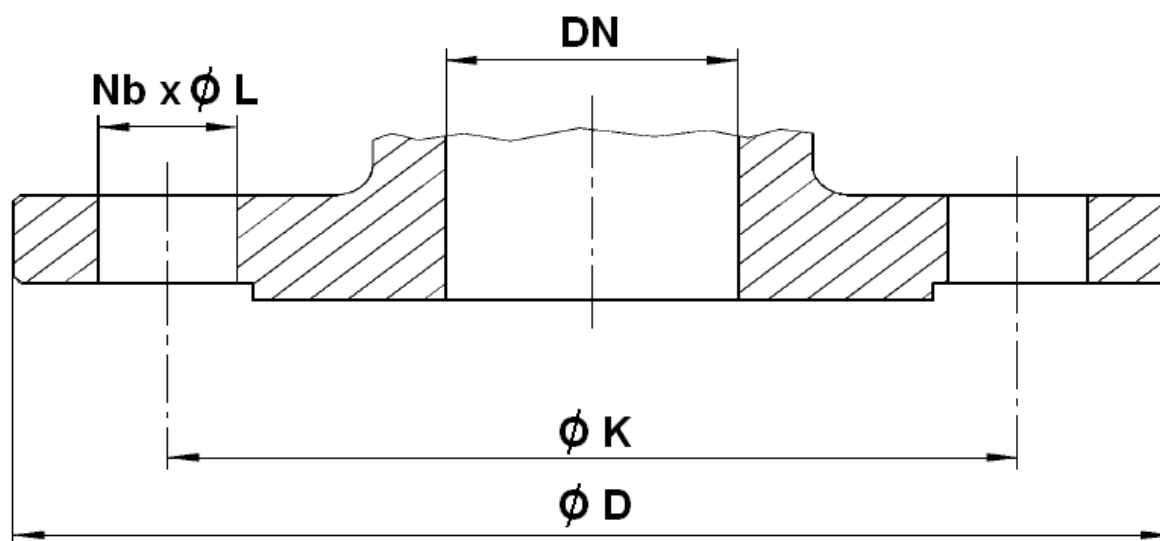

DN	40	50	65	80	100	125	150	200	250	300
Ø D	150	165	185	200	226	253	285	342	403	450
Ø K	110	125	145	160	180	210	240	295	350	400
Nb x Ø L	4 x 19	4 x 19	4 x 19	8 x 19	8 x 19	8 x 19	8 x 23	8 x 23	12 x 23	12 x 23


DUCTILE IRON FLANGED BALL CHECK VALVE PN10

STANDARDS :


- Manufacturer certified ISO 9001 : 2015
- DIRECTIVE 2014/68/EU : Products excluded from directive (Article 1, § 2b)
- Certificate 3.1 on request
- PN10 Flanges according to EN 1092-2
- Length according to EN 558 series 48 (DIN 3202 F6)
- **Body** test according to ISO 5208, Rate A

INSTALLATION POSITIONS :

Vertical position (Ascendant fluid)

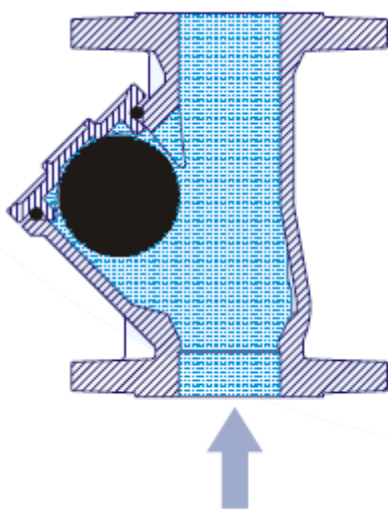

Horizontal position

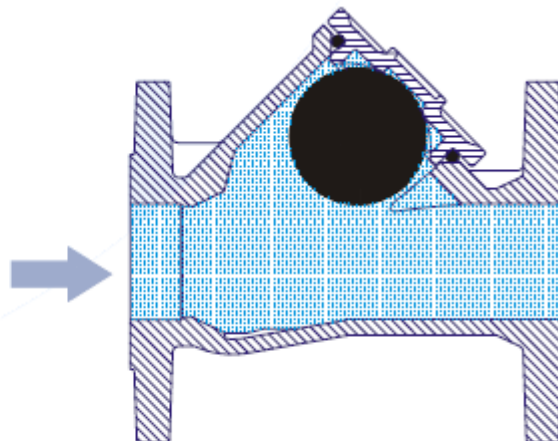

ADVICE : Our opinion and our advice are not guaranteed and SFERACO shall not be liable for the consequences of damages. The customer must check the right choice of the products with the real service conditions.