

COIL SIPHONS FOR PRESSURE GAUGE MALE BSP

Male BSP coil siphons to reduce the temperature of the fluid before contact with the pressure gauge.

2 types: coil siphons or U-shaped.

Available in stainless steel, copper or steel



Size : DN1/4" to DN1/2"

Connection : Male or female BSP

Min Temperature : -20°C (for stainless steel types)

Max Temperature : +200°C (for stainless steel types)

Max Pressure : 40 bars (for stainless steel types)

Specifications : Coil siphons or U type

Materials : Copper, carbon steel or stainless steel

COIL SIPHONS FOR PRESSURE GAUGE MALE BSP

SPECIFICATIONS :

- Coil siphon or U type

USE :

- To reduce temperature of the fluid before the contact with the pressure gauge
- Min and max Temperature Ts : according to types, see below
- Max pressure Ps : according to types, see below

RANGE :



- Coil siphon Copper Male Female BSP DN1/4" and DN1/2" **Ref. 9880202 and 9880204**
 - Max Pressure Ps : 25 bars
 - Min and max Temperature Ts : 0°C to +120°C



- Coil siphon stainless steel AISI 304 Male Female BSP DN1/4" and DN1/2" **Ref. 9880207 and 9880208**
 - Max Pressure Ps : 40 bars
 - Min and max Temperature Ts : -20°C to +200°C




- Coil siphon carbon steel Male Male BSP DN1/4" and DN1/2" **Ref. 9880200 and 9880201**
 - Max Pressure Ps : 25 bars
 - Min and max Temperature Ts : -20°C to +120°C



- U type siphon carbon steel Male Male BSP DN1/4" and DN1/2" **Ref. 9880205 and 9880206**
 - Max Pressure Ps : 25 bars
 - Min and max Temperature Ts : -20°C to +120°C


COIL SIPHONS FOR PRESSURE GAUGE MALE BSP

SIZE (in mm) :

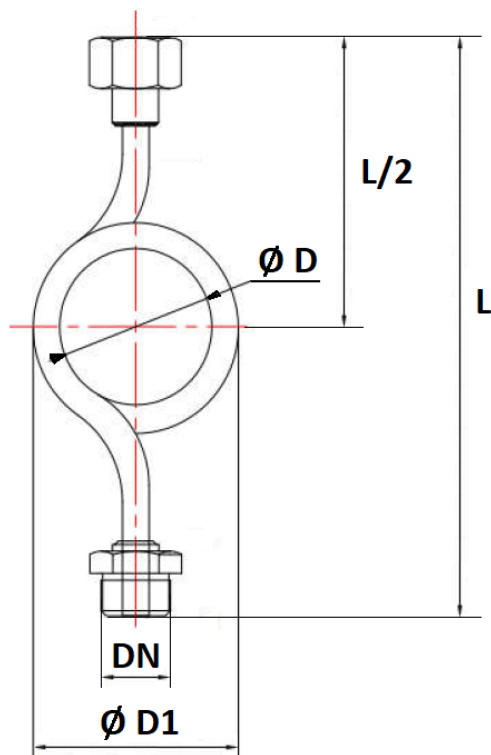

Copper types		
DN	1/4"	1/2"
L	170	172
L/2	85	86
Ø D	48	48
Ø D1	64	64
Weight (in Kg)	0.1	0.15
Ref.	9880202	9880204


Stainless steel types		
DN	1/4"	1/2"
L	172	170
L/2	86	85
Ø D	46	
Ø D1	64	
Weight (in Kg)	0.3	0.3
Ref.	9880207	9880208

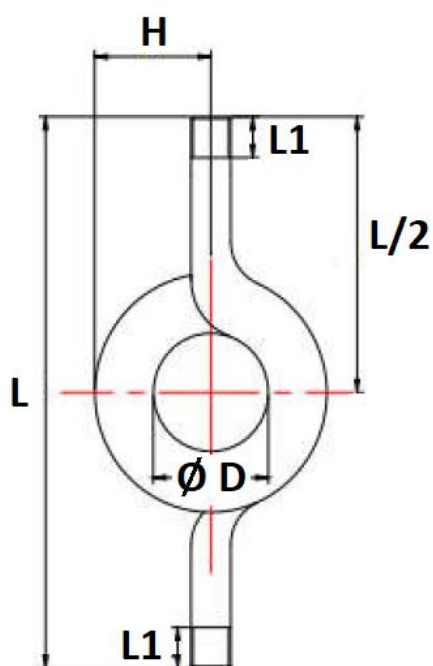

Carbon steel types		
DN	1/4"	1/2"
L	235	230
L/2	117.5	115
L1	20	
H	36	50
Ø D	46	58
Weight (in Kg)	0.45	0.5
Ref.	9880200	9880201

COIL SIPHONS FOR PRESSURE GAUGE MALE BSP

SIZE (in mm) :

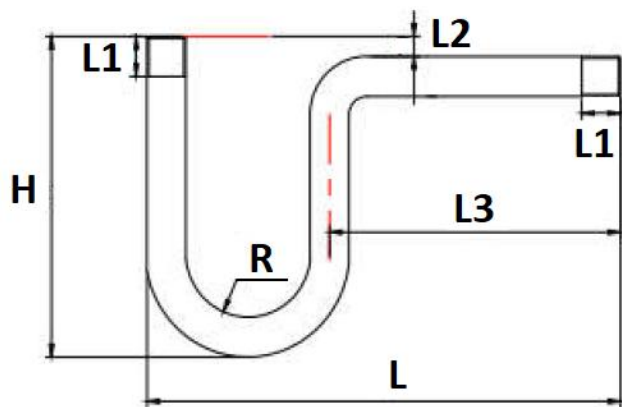

U siphon carbon steel types		
DN	1/4"	1/2"
L	156	239
L1	20	
L2	10	
L3	90	150
H	120	165
R	23	29
Weight (in Kg)	1.2	1.2
Ref.	9880205	9880206

STANDARDS :

- Manufacturer certified ISO 9001 : 2015
- DIRECTIVE 2014/68/EU : Products excluded from directive (article 4, § 3)
- Threaded male and female BSP cylindrical ends according to ISO 228-1

ADVICE : Our opinion and our advice are not guaranteed and SFERACO shall not be liable for the consequences of damages.
The customer must check the right choice of the products with the real service conditions.